


CAR LIFTS

Instantly Double Your Parking Space

space saving smart choice

Adding a car lift to the garage allows you the opportunity to keep your prized vehicles at home. Instantly double your parking space without the cost of a major renovation or expensive off-site storage. Great for a summer car or just to accommodate two vehicles in one parking space. Lifts are ideal for residential applications and can be installed within one day.

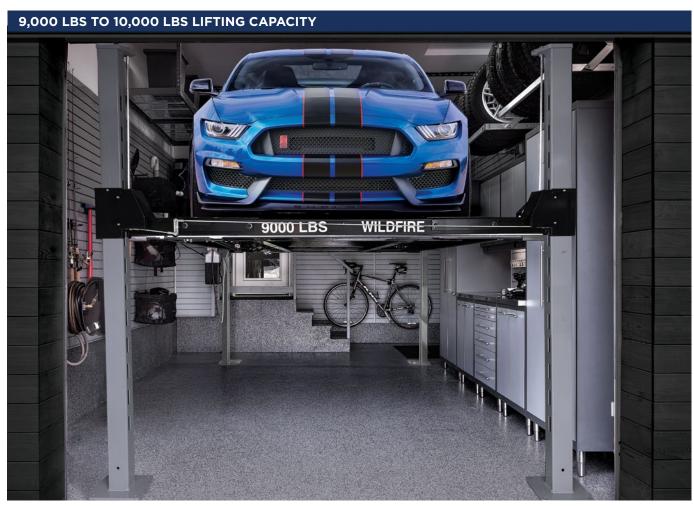







^{*} Local conditions apply.



CAR LIFTS

Will A Car Lift Fit In My Garage?

ask about
a high lift
garage door
conversion to
maximize your
garage ceiling
height

Every garage is different and there are 4 factors that will determine if a car lift will fit: **vehicle heights**, **ceiling height**, **garage door track setup** and **garage door operator**. If you can park your vehicle in the garage then you have enough floor space for a car lift. The last thing is the garage door. You may need a high lift conversion for your door so it opens at a higher level within your garage. The minimum height required for a lift installation is 10'6"-13' or more depending on the type of vehicle being stored. In most cases, we can tell you over the phone if you can fit a car lift in your garage.

SPECIFICATIONS					
	Standard (WF9000)	Exotic (WF9000EXW)	XLT (WF9000XLT)	Double Wide (WF10000DW)	Trailer Lift (WF7500TL)
Capacity	9,000lbs	9,000lbs	9,000lbs	10,000lbs	7,500lbs
Lifting Height To Top of Runway	6' 4.5"	6' 4.5"	7' 2.5"	7' 6"	7' 2.5"
Clearance Under Runways	6'	6'	6′ 10″	6′ 9″	6′ 10″
Height of Columns	7' 8" (7' 10" w/cable & nuts)	7' 8" (7' 10" w/cable & nuts)	8' 6" (8' 8" w/cable & nuts)	8' 10" (9' w/cable & nuts)	8′ 6″ (8′ 8″ w/cable & nuts)
Overall Width (With Motor)	9' 7" (115")	10′ 1″ (121″)	10' 1" (121")	17′ 9″ (213″)	11' 7.5" (139.5")
Overall Length with Approach Ramps	17′ 9″	18′ 9″	19′ 6″	20' 6"	19' 6"
Overall Length Without Approach Ramps	15′ 2″	15′ 2″	16′ 11″	16′ 11″	16′ 11″
Approach Ramps	36" Steel	48" Aluminum	36" Steel	48" Aluminum	36" Steel
Runway Width	19"	23"	19"	19"	19"
Runway Length	170"	170"	190"	190"	190"
Runway Thickness	4.5"	4.5"	4.5"	4.5"	4.5"
Width Between Runways	38"	38"	38"	38" (16" between center cars)	Variable, 50" 60" or 69"
Width Between Runway Rails	35"	35"	35"	35"	No runway rails
Outside Runway to Outside Runway	76"	84"	76"	76"	Variable 88", 98" or 107"
Size of Column	5" x 5"	5" x 5"	5" × 5"	5" x 5"	5" x 5"
Clearance Between Columns	97.5"	103.5"	103.5"	16′ 4″	10' 2.5" (122.5")
Drive Through (Outside of tire to outside of tire)	7' 3.5" (87.5")	7' 9.5" (93.5")	7' 9.5" (93.5")	15′ 4″	9' 4" (112")
Shipping Weight	2085lbs	2285lbs	2450lbs	3880lbs	2475lbs
Power Requirements	110V/20amp	110V/20amp	110V/20amp	110V/20amp	110V/20amp